

Flipsky 75200 Pro V2.0 · hole pattern, full size

Print at 100 percent ("Actual size", not "Fit"). The bar at the bottom must be exactly 4 in.

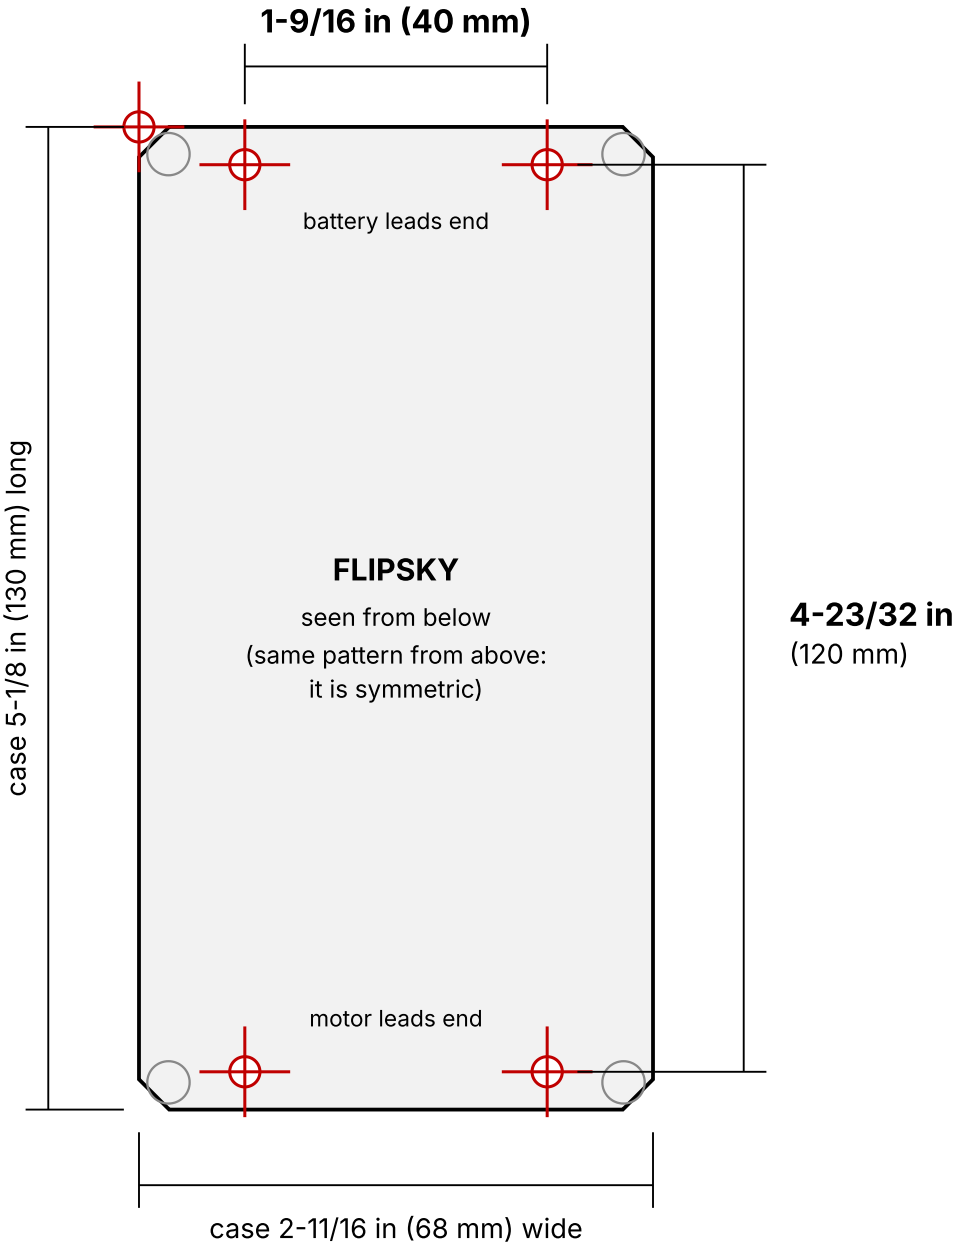

its 4 mounting holes: threaded, blind, in the bottom plate

its 4 case screws: hold the case together, not for mounting



Pattern 40 × 120 mm, read off Flipsky's own photo of the bottom (130 × 68 mm case, the holes land on round numbers and dead center). Flipsky publishes no drawing. Thread size not on record: likely M3 or M4 (a guess). Oct 26, 2026.

Use (Mike, Oct 26): lay this sheet inside the box where the Flipsky goes, punch the 4 centers, drill to clear the screws (M3 9/64 in, M4 11/64 in), countersink from outside (90 degrees for metric flat heads). 316 flat-heads go up from outside into the Flipsky, before the box is glued to the hull.